



# Standard EN 14351-1:2006+A1:2010

- Thermal transmittance: 0.98 W/m<sup>2</sup>K .
- Sound insulation: Rw (C; Ctr) = 34 (-1; -5).
- Frame depth 105mm.
- Engineered Northern Redwood quality class A1– A3.
- Glazing: triple glazing (Ug = 0,6 W/m<sup>2</sup>K).
- Hardware: PN-Beslag hinges, Fix espagnolettes; and lockable handles.andles.

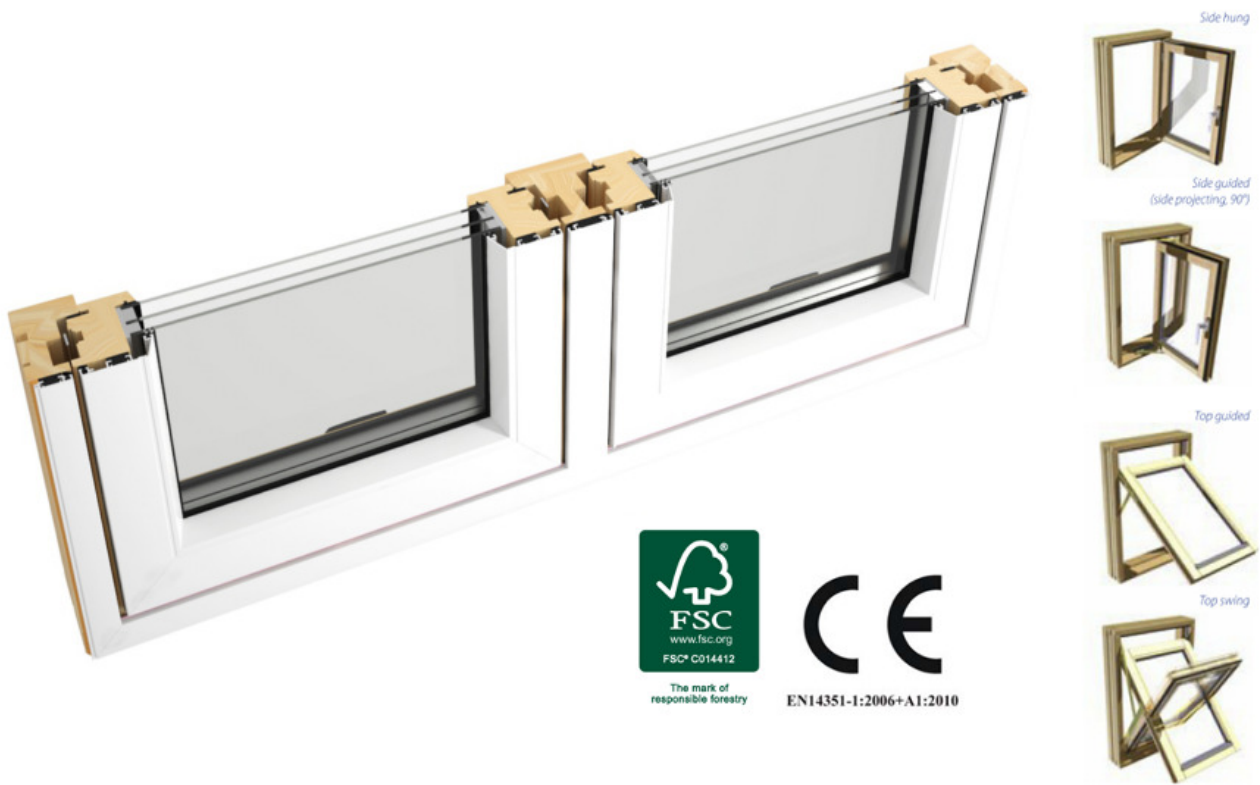

|   |  |   |
|---|--|---|
| <br>sales@nordica-uk.com<br>www.nordica-uk.com | DESCRIPTION  | NORDICA UK LTD                          |
|   | SW11 OUTWARD OPENING<br>ALU-CLAD WINDOW<br>TECHNICAL DETAILS | REF: SWT-0                              |
|   |  | DATE: 23.05.2011                        |
|   |  | SCALE: A4 1:1, do not scale pdf-version |