



# Standard EN 14351-1:2006+A1:2010

- Thermal transmittance: 26mm = 1.3 W/m<sup>2</sup>K (window size 1230x1480mm)
- Air permeability; Class 3, Watertightness; Class 5A, Wind load; Class C3
- Frame depth 68mm
- Engineered Northern Redwood, Meranti or Oak
- Glazing: Double glazed 26mm 4-18-4 Ug = 1,1W/m<sup>2</sup>K  
Triple glazed 32mm 4-10-4-10-4 Ug = 0,8W/m<sup>2</sup>K
- Hardware: Roto NT; Siegenia Titan VV; and lockable HOPPE handles.

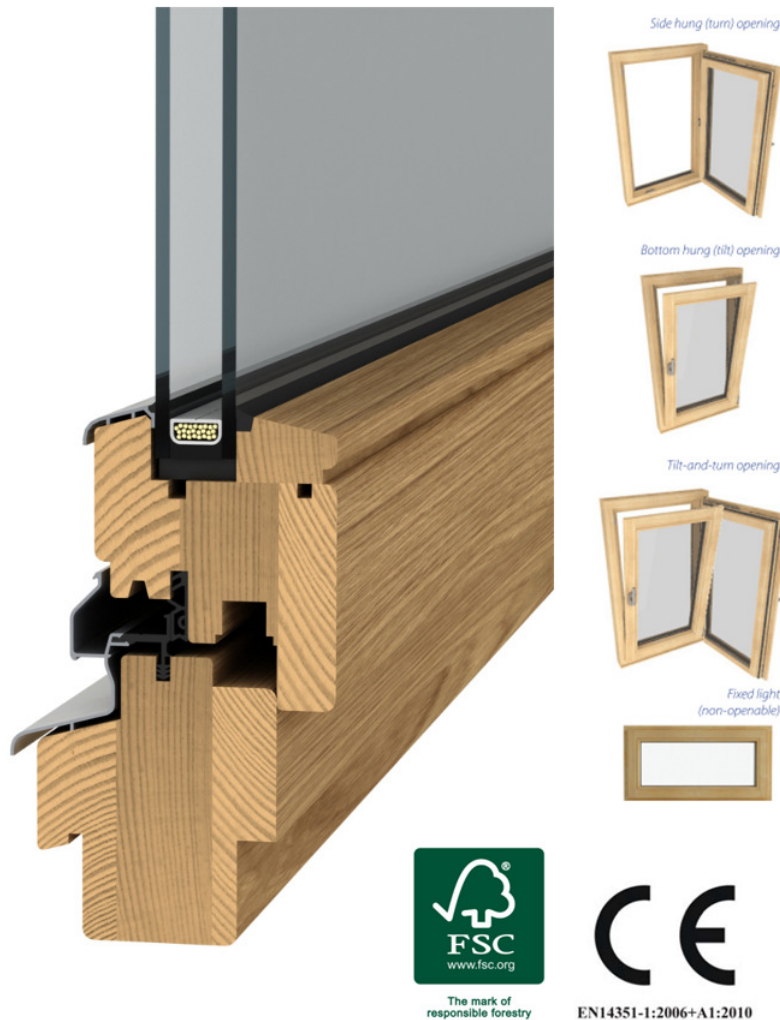

 sales@nordica-uk.com www.nordica-uk.com	DESCRIPTION	NORDICA UK LTD
	IV68 TILT & TURN TIMBER WINDOW	REF: IV68-0
	TECHNICAL DETAILS	DATE: 15.04.2014
		SCALE: N/A